

# 施工说明书 Installation Manual

安装产品前请仔细阅读本施工说明书，并保留备用。  
Before installing the product, please read the Installation Manual carefully and keep it for future reference.

# TOTO

# TOTO



安装完成后，本说明书务必交由客户保存。  
After installation, the manual must be kept by the customer.

0G343G(C)  
2023.05

# 目录

---

## 目 录

目录.....	1
明细单.....	2
使用条件与施工上的注意.....	3
保养.....	4
安装完成图.....	5-7
水嘴的安装.....	8
生产厂家与销售商.....	9

TOTO Asia Oceania Pte. Ltd.

Telephone: 65-6744-6955

FAX: 65-6841-0819

Address: 10 Eunos Road 8 #12-07 Singapore Post Centre

Singapore 408600

Website: asia.toto.com

TOTO KOREA LTD.

전화번호 : (02)-3141-8236



FAX 번호 : (02)-3141-8240

주소 : 서울시 마포구 상수동 351-16번지 로이코빌딩 3층

홈페이지 : <https://kr.toto.com/>

# Installation of Spout

1. Cleaning in the water supply pipe  
Before installation, be sure to flush foreign matter such as dust and gravel in the water supply pipe.
  2. Installation of Spout
    - (1) Wind an appropriate amount of Teflon tape on the thread of fixed connector and screw it into the water supply line. Be sure to tighten it sufficiently.
    - (2) Unscrew the fixing screws and anti-dropping screws, and then install the main body of spout onto the fixed connector. Tighten the spout with the fixing screws and then tighten the anti-dropping screws. (After applying some soap water, etc. on the O-ring of the fixed connector, it will be easier to assemble)
- Note: ① Adjust the water outlet to the optimum position.  
 ② To ensure that the body can fully cover the mounting hole after installation, the outer diameter of the wall opening should not be greater than  $\phi 47$ . Please make sure the mounting hole dimension is correct, otherwise, the components buried in wall may not be fully covered after installation.  
 ③ Please make sure to tightly lock the fixing screws and anti-dropping screws, otherwise the body of water outlet is likely to fall.

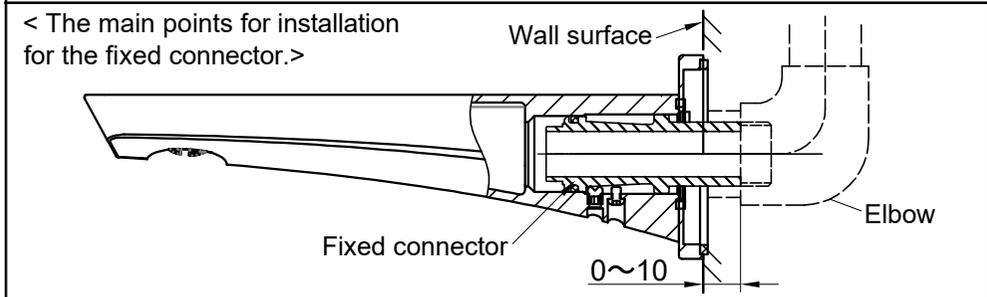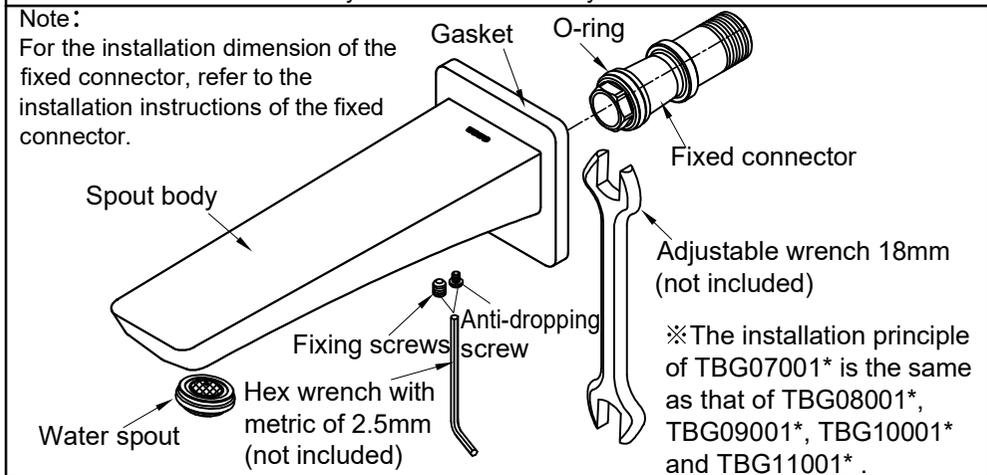

# 明细单

## 明细单

浴用吐水口本体 .....	1套
固定接手 .....	1套
施工说明书 .....	1本
使用说明书 .....	1本

使用此明细单的产品包括:

- TBG07001\* 浴用吐水口
- TBG08001\* 浴用吐水口
- TBG09001\* 浴用吐水口
- TBG10001\* 浴用吐水口
- TBG11001\* 浴用吐水口

# 使用条件与施工上的注意

## 使用条件

### 1. 供冷水\*热水压力:

- 最低压力.....0.05MPa (流动压)
- 最高压力.....1.0MPa (静压)
- 推荐使用压力.....0.1~0.5MPa (流动压)
- 检测压力.....0.4MPa (静压)

### 2. 供水温度在4℃~90℃, 建议使用热水温度60℃, 供热水请勿使用蒸汽。

### 3. 使用环境温度0℃以上。如果不高于0℃, 水嘴会出现变形、冻裂现象。

### 4. 长时间不使用时, 可导致水嘴内部及外部锈蚀不能使用等现象。

### 5. 如果您需要废弃本产品, 请勿将其作为一般生活垃圾处理, 请依照法规经由独立的回收体系进行合适的处理、恢复和回收。

### 6. 本说明书中的产品具有清洗功能。

## 施工上的注意

⚠警告 表示如果无视此标志而误操作时,有可能造成人员重伤或死亡。

⚠注意 表示如果无视此标志而误操作时,有可能造成人身伤害或财产损失。

### ⚠警告


1. 水嘴的供热水一侧处于高温状态, 请注意勿使皮肤直接接触五金配件表面, 否则可能会烫伤。
2. 请勿配反冷\*热水配管, 否则可能会烫伤。
3. 供热水请勿使用蒸汽, 否则可能会烫伤。

### ⚠注意

1. 请勿撞击本产品, 否则可能会造成故障、漏水。
2. 随着产品式样的不断更新, 实物存在与图示不符的情况, 但基本安装、使用原理相同。
3. 在可能结冰的场所使用时, 要切实做好防冻措施。  
由于结冰, 零件破损, 有可能导致漏水, 造成财产损失。因结冰而造成的破损即使在保修期内也是有偿修理。请不要让产品的温度低于0℃。

# Installation completion diagram


TBG11001\* series  
"GF" Bath Spout

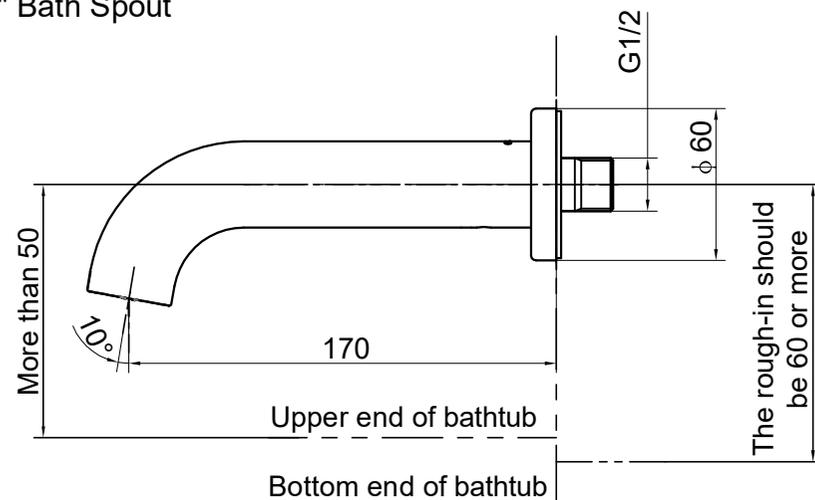


Note: The unit of size in the figure is mm.

# Installation completion diagram

TBG09001\* series  
"GM" Bath Spout

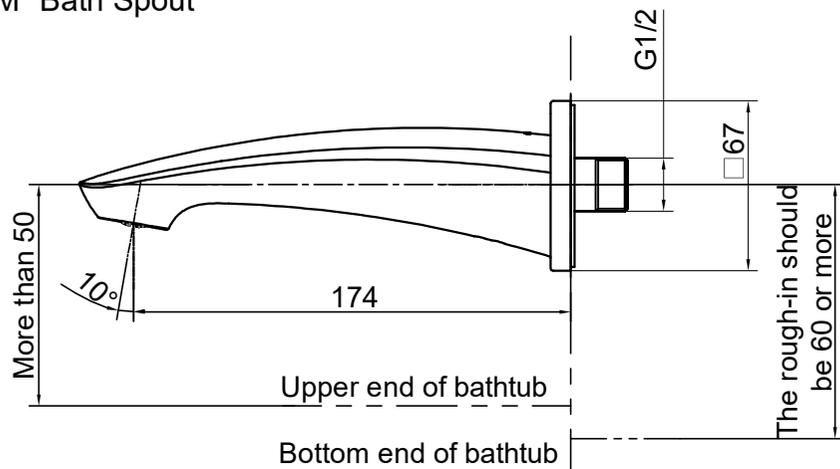

TBG10001\* series  
"GB" Bath Spout

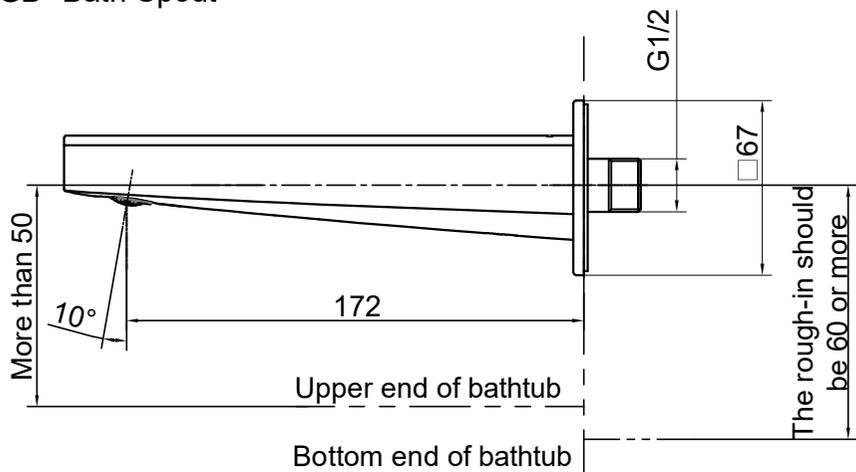

Note: The unit of size in the figure is mm.

# 保养

## 防冻措施

在可能结冰的场所使用时，要切实做好防冻措施。

1. 产品结冰的话零件损坏，成为漏水的原因。
2. 因结冰造成的零件损坏即使在保修期内也是有偿修理。
3. 施工完了后或长时间不使用时，要有预防突然降温的准备，要对产品进行结冰预防。
4. 因为有结冰的危险，请不要让产品周围的温度在0℃以下。

## 保养


为长期保持产品的美观，请用户按以下方法维护保养。

1. 经常用软布擦拭或用软布蘸水擦拭。
2. 当有污垢且较明显时，请用中性洗涤剂擦拭后充分进行水洗。


# 安装完成图

# Installation completion diagram

TBG07001\*系列  
浴用吐水口

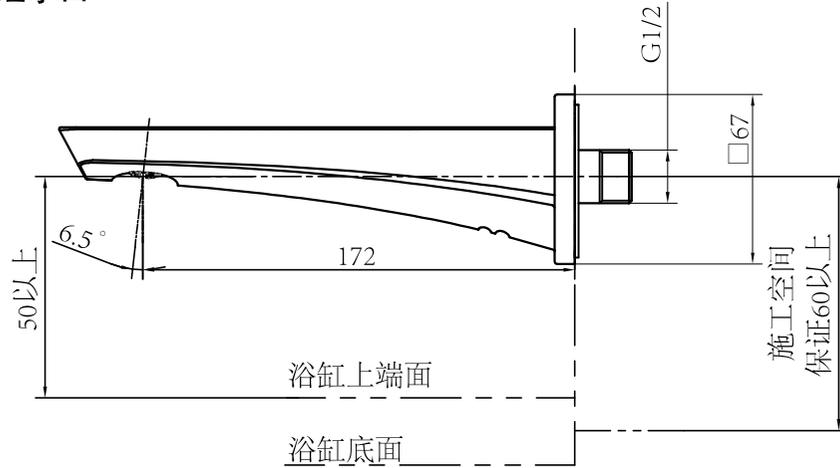


TBG08001\*系列  
浴用吐水口

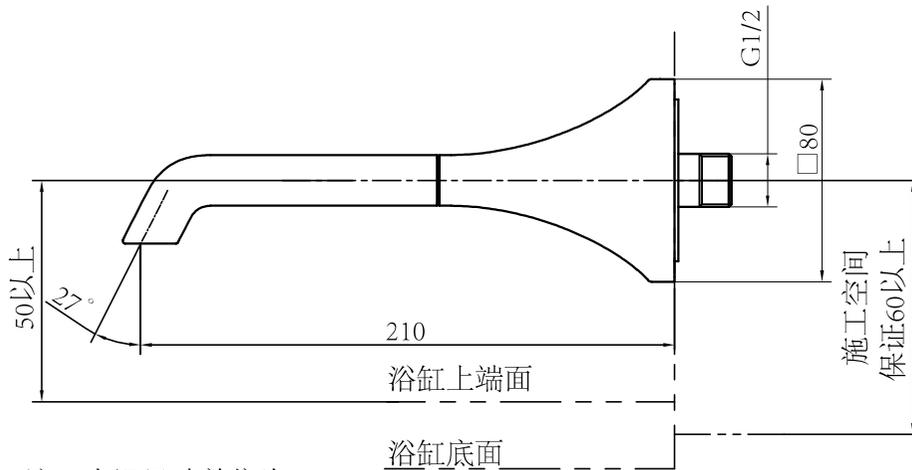


注：上記尺寸单位为mm。

TBG07001\* series  
"GE" Bath Spout

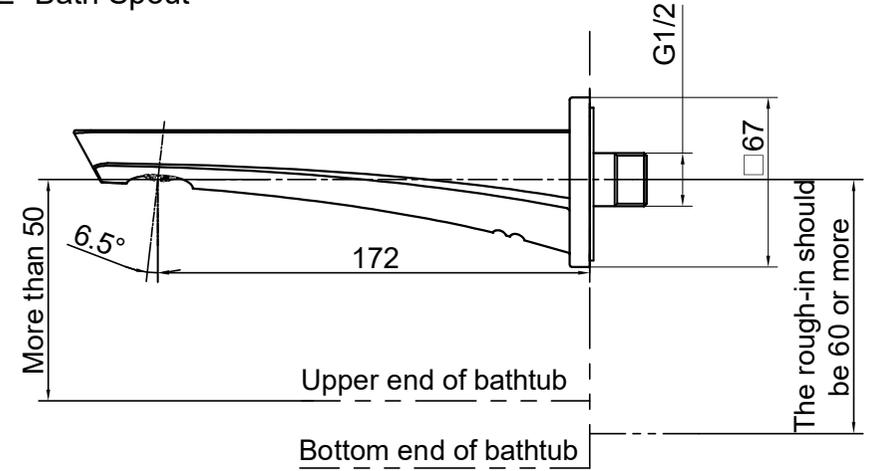

TBG08001\* series  
"GC" Bath Spout

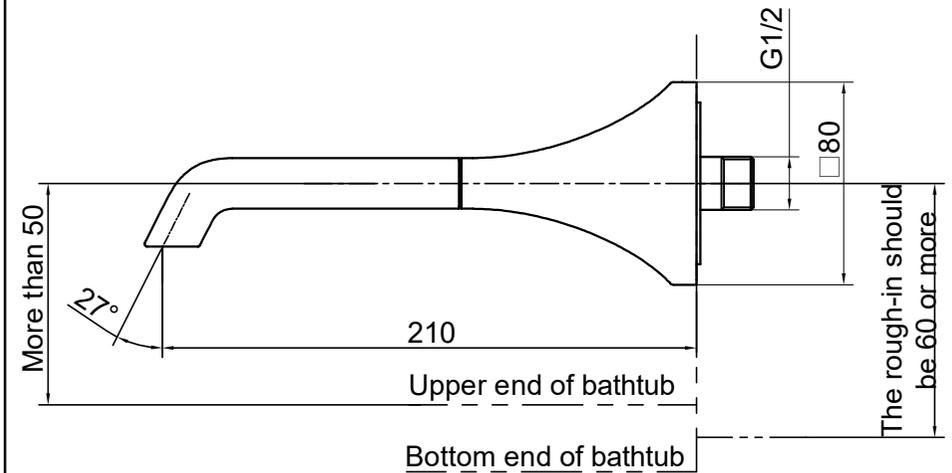

Note: The unit of size in the figure is mm.

## Anti-freezing measures and maintenance

### Anti-freezing measures

When using in places where frost damage may occur, anti-freezing measures must be taken.

1. The parts will be damaged due to frost damage, which may cause water leakage.
2. Damaged parts caused by frost damage are repaired for a fee even during the warranty period.
3. After the construction is completed or when it is not used for a long time, prepare to prevent sudden drop of temperature and prevent the product from frost damage.
4. Because of the risk of frost damage, please ensure that the ambient temperature of the product is always above 0°C.


### Maintenance

In order to maintain the decent appearance of the product for a long time, please maintain it according to the following methods.


1. Wipe with a soft cloth often, or wipe with a soft cloth with water occasionally.
2. When there is dirt and it is obvious, please wash it with water thoroughly after wiping it with neutral detergent.

## 安装完成图

TBG09001\*系列  
浴用吐水口

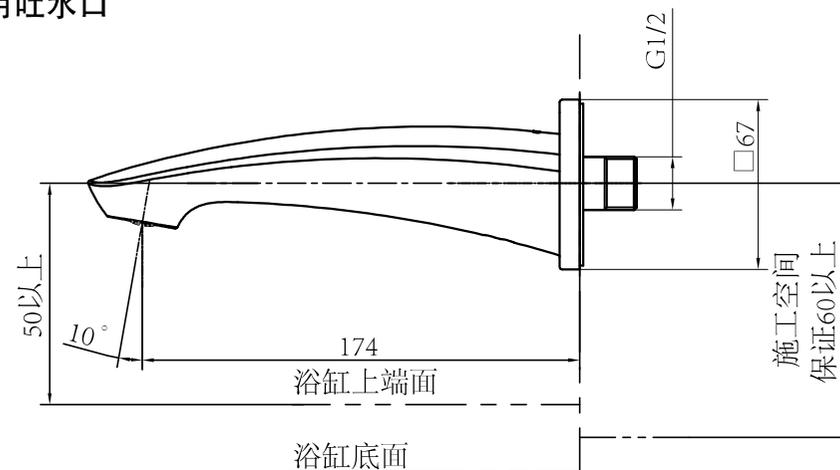


TBG10001\*系列  
浴用吐水口

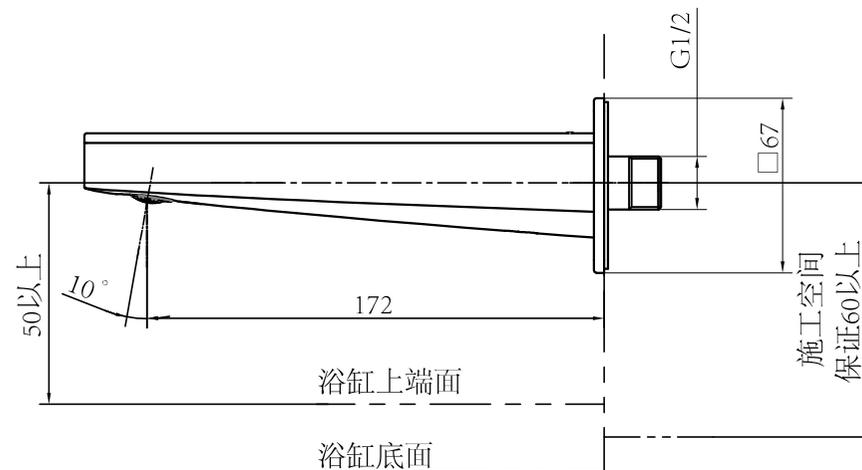

注：上記尺寸单位为mm。

# 安装完成图

TBG11001\*系列  
浴用吐水口

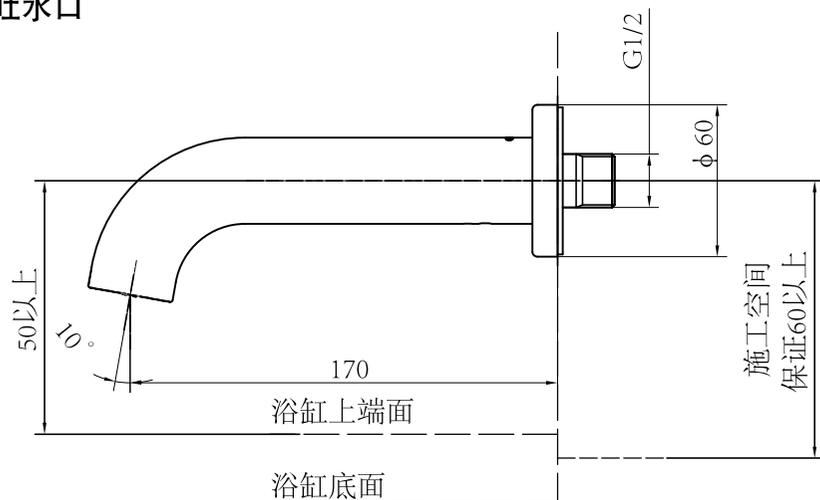

注：上記尺寸单位为mm。

# Use Conditions and Attention on Installation

## Use Conditions

1. Pressure for cold water \* hot water supplying
  - Minimum pressure ..... 0.05MPa (flow pressure)
  - Maximum pressure ..... 1.0MPa (static pressure)
  - Recommended pressure ..... 0.1~0.5MPa (flow pressure)
  - Detection pressure ..... 0.4MPa (static pressure)
2. The water supply temperature is between 4°C and 90°C. It is recommended to use hot water temperature of 60 °C. Do not use steam when supplying hot water.
3. Ambient temperature of the use above 0°C. If it is lower than 0°C, the spout will have some issues such as deformations, cracking, etc..
4. When it is not used for a long time, it may cause the inside and outside of the spout to rust and corrode, leading to malfunction.
5. If you need to dispose of this product, do not dispose of it as general household waste. Please follow the regulations to properly dispose, recover and recycle it through an independent recycling system.
6. The products stated in the Manual have a cleaning function.

## Attention on Installation

- ⚠ Warning: Indicates that if you overlook this sign, causing misoperation, it may result in serious injury or death.
- ⚠ Attention: Indicates that if you overlook this sign, causing misoperation, it may cause personal injury or property damage.

### ⚠ Warning

1. As one side of the spout to supply hot water is in a high-temperature state, do not let the skin be directly in contact with the surface of the hardware fitting; otherwise it may cause burn injuries.
2. Do not assemble cold \* hot water tubing incorrectly; otherwise it may cause burn injuries.
3. Do not use steam when supplying hot water; otherwise it may cause burn injuries.

### ⚠ Attention

1. Do not hit this product; otherwise it may cause malfunction or water leakage.
2. With the product model being updated constantly, the physical object may not coincide with the figure. However, the basic installation and operation principles are the same.
3. When using in places where frost damage may occur, anti-freezing measures must be taken. The parts will be damaged due to frost damage, which may cause water leakage and property loss. Damages caused by frost damage are repaired for a fee even during the warranty period. Please ensure that the ambient temperature of the product is always above 0°C.

# Specification

## Specification

Spout Body.....	1 set
Fixed connector.....	1 set
Installation Manual.....	1 booklet
User Manual.....	1 booklet

Products using this specification include:

TBG07001\* "GE" Bath Spout  
TBG08001\* "GC" Bath Spout  
TBG09001\* "GM" Bath Spout  
TBG10001\* "GB" Bath Spout  
TBG11001\* "GF" Bath Spout

# 水嘴的安装

## 1. 供水管内的清扫

水嘴安装前必须先将供水管内的尘埃、砂砾等到完全洗净、冲出。

## 2. 水嘴主体部分的安装

- (1)将固定接手螺纹处缠上适量生料带，旋进供水管中，要充分拧紧。
- (2)将固定螺丝和防掉螺丝拧下，然后将吐水主体装到固定接手上，先用固定螺丝充分拧紧，再锁紧防掉螺丝即可。（在固定接手的O型圈上涂肥皂水等之后会更容易装配）


注意：①调整吐水口至最佳方向。

②为确保安装后本体能完全盖住安装孔，墙壁开孔的外径不能大于 $\phi 47$ ，请把握好安装孔的开孔尺寸，否则会出现安装后埋墙部件不能被遮盖的现象。


③请确保锁紧固定和防掉螺钉，否则有可能出现吐水本体掉落的风险。

注意：

固定接手安装尺寸见  
固定接手安装要领。

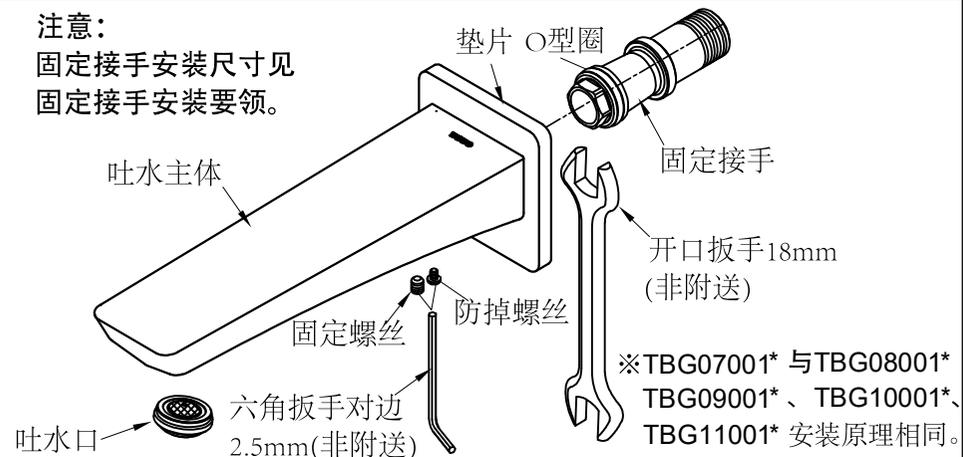

<固定接手安装要领>

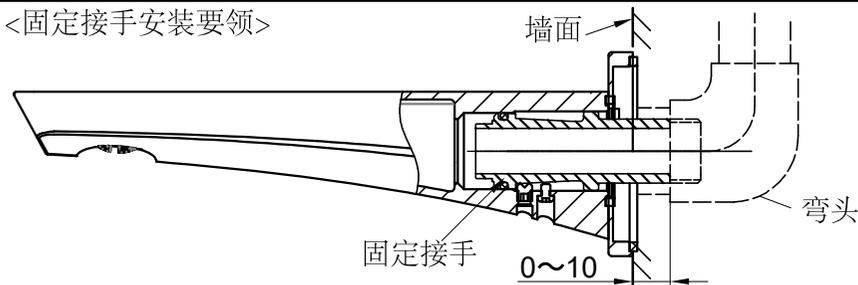

# 生产厂家与销售商

产品型号：见包装箱上的标签

产品名称：见包装箱上的标签

生产日期：见包装箱上的标签

组装工厂：东陶机器(广州)有限公司

厂 址：广州市番禺区南村镇兴南大道715号

东陶(中国)有限公司

全国售后服务电话：800-820-9787(固定电话)

400-820-9787(手机用户)



扫描二维码，  
服务预约，方便快捷

销售商：东陶(中国)有限公司

地 址：北京市朝阳区光华路1号 北京嘉里中心北楼1915室

网 址：www.toto.com.cn

# Table of Contents

## Table of Contents

Table of Contents .....	1
Specification .....	2
Use Conditions and Attention on Installation.....	3
Anti-freezing measures and maintenance ...	4
Installation Completion Diagram .....	5-7
Installation of Spout.....	8