

DLE110A2N



Reduce
The Water



Ecopower

FEATURES

- Infra-red sensor, public use applicable.
- 3V voltage, lower power consumption
- Individual thermostatic value, easy to install.
- AC, DC and ecopower, three types for choices.
- Smaller body, space saving.

Matchable functional parts:

Single		
Ecopower 2L	AC 1.5L	DC 1.5L
DLE124DH	DLE124DE	DLE124DK
Thermostatic		
Ecopower 2L	AC 1.5L	DC 1.5L
DLE124DH + DLE424SMA	DLE124DE + DLE424SMA	DLE124DK + DLE424SMA
Water Heater		
REAH03A2CR		

SPECIFICS

Water supply:


0.05MPa(dynamic pressure) ~
0.75MPa(static pressure)

Detection range:130-200mm

Operating temperature:0~55°C


Drainage accessory: not
included

DLE110A2N+DLE124DE/DLE124DK/DLE124DH Aqua-auto faucet (Single)

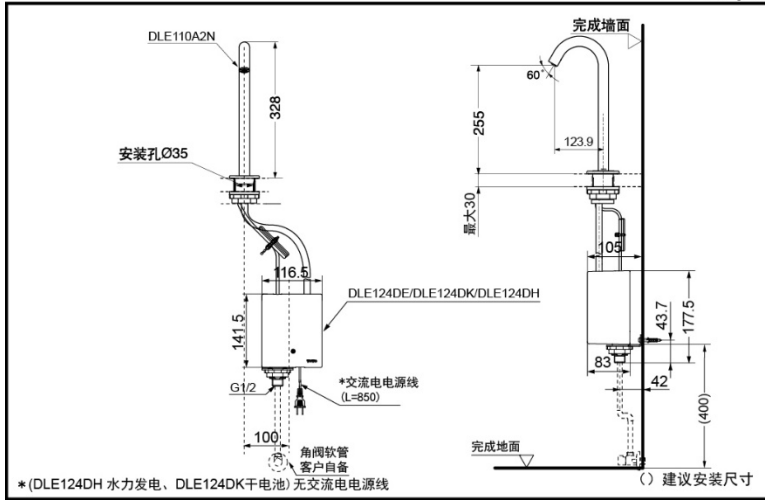

*TOTO公司保留对其产品规格和尺寸更改的权利。届时，恕不另行通知。

DLE110A2N+DLE124DE/DLE124DK/DLE124DH +DLE424SMA Aqua-auto faucet (thermal)

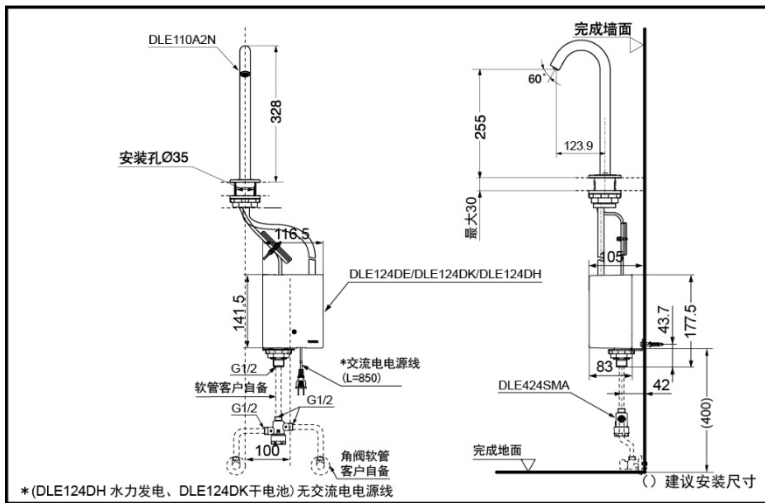

*TOTO公司保留对其产品规格和尺寸更改的权利。届时，恕不另行通知。

*TOTO(CHINA) CO.,LTD. All rights reserved.