

TLE24004B



SOFT FLOW



WATER SAVING



HYDRO ELECTRIC POWER

※only with TLE03501B

FEATURES

- Beautiful appearance, generous.
- Beautiful shape, noble quality
- It is easy to install and use
- The unique bubble spitting technology makes the water flow smooth and strong.
- 1.3L water can save water and bring more comfortable experience


SPECIFICES

- Water Inlet Requirement :**
0.05MPa(Dynamic Pressure)
~0.75MPa(Static Pressure)
- Water Efficiency :** Grade 1
- Drainage accessory :**
not included
- Operating temperature :**
1~55°C
- Detection range:** ≤250mm

OTHERS


- Recommend fittings :**
- Functional Part:
TLE01501B(AC)
TLE04501B(DC)
TLE03501B(HYDRO ELECTRIC POWER)
Thermostatic : TLE05701B

TLE24004B+TLE01501B/TLE03501B/TLE04501B Aqua-auto faucet(single)

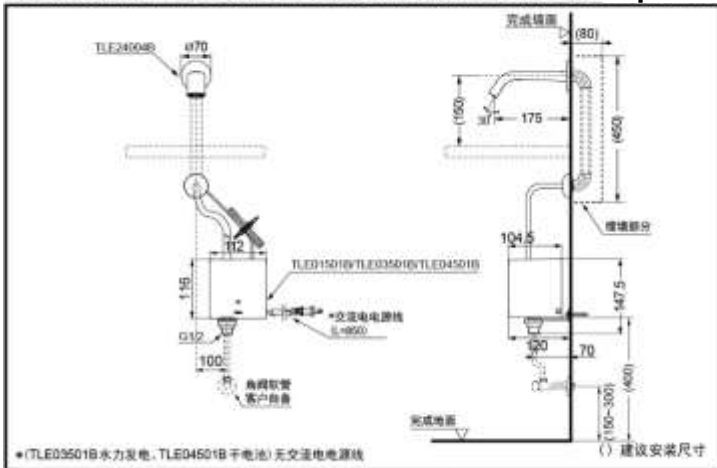

TOTO(CHINA) CO.,LTD. All rights reserved.

TLE24004B+TLE01501B/TLE03501B/TLE04501B +TLE05701B Aqua-auto faucet(thermal)

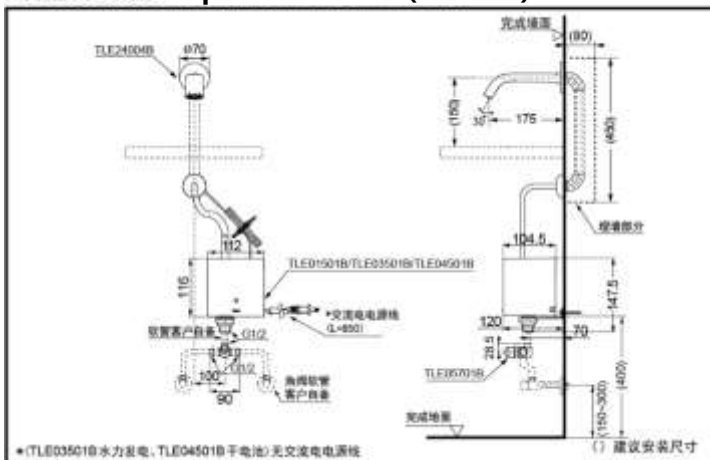

TOTO(CHINA) CO.,LTD. All rights reserved.

TOTO(CHINA) CO.,LTD. www.toto.com.cn