

**TLE24002C1**  
**TLE24002C2**  
**TLE24002C3**

### FEATURES

- Beautiful appearance, generous.
- Beautiful shape, noble quality
- It is easy to install and use
- The unique bubble spitting technology makes the water flow smooth and strong.
- 1.3L water can save water and bring more comfortable experience



SOFT FLOW




WATER SAVING



HYDRO ELECTRIC POWER


※only with TLE03501B

**TLE24002C1+TLE01501B**  
**TLE24002C2+TLE04501B**  
**TLE24002C3+TLE03501B Aqua-auto faucet(single)**

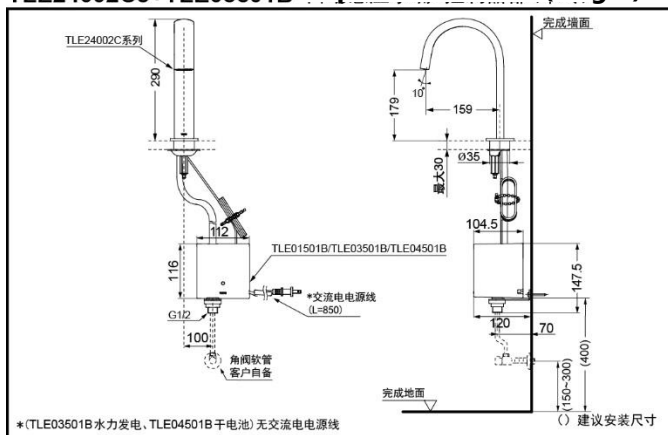

TOTO(CHINA) CO.,LTD. All rights reserved.

**TLE24002C1+TLE01501B+TLE05701B**  
**TLE24002C2+TLE04501B+TLE05701B**  
**TLE24002C3+TLE03501B+TLE05701B Aqua-auto faucet(thermal)**

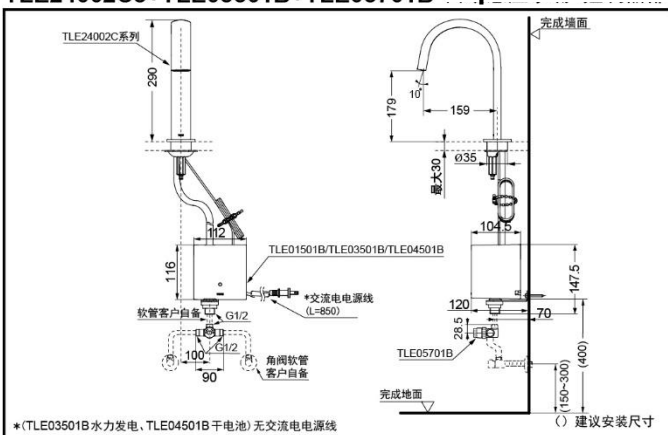

TOTO(CHINA) CO.,LTD. All rights reserved.  
 TOTO(CHINA) CO.,LTD. www.toto.com.cn

### SPECIFICS

- Water Inlet Requirement:**  
 0.05MPa(Dynamic Pressure)  
 ~0.75MPa(Static Pressure)
- Water Efficiency:** Grade I
- Drainage accessory:**  
 not included
- Operating temperature:**  
 1~55°C
- Detection range:** ≤250mm

### OTHERS

**Recommend fittings:**

- Functional Part:  
 TLE01501B(AC)  
 TLE04501B(DC)  
 TLE03501B(HYDRO ELECTRIC POWER)  
 Thermostatic: TLE05701B