

## PRODUCT SPECIFICATIONS

The NEOREST WX1 with the TORNADO FLUSH system toilet shall be 4.5LPF / 3.0LPF .Toilet shall have CEFIONTECT ceramic glaze. Top Unit shall have EWATER+ auto-cleans wand , bowl , and under-seat with auto open and close lid.

## FEATURES

- TORNADO FLUSH® System utilizes 360° cleaning power to reach every part of the hole-free rim design bowl
- CEFIONTECT® ceramic glaze minimizes waste from sticking to porous ceramic surfaces
  - EWATER+® auto-cleans wand, bowl, and under-seat
  - PREMIST® on bowl before each use
  - Ultra high-efficiency dual flush function - 4.5L/3.0L
  - Gentle Aerated, Warm Water, Dual Action Spray with oscillating and pulsating feature
  - Auto lid open/close
  - Auto flush
  - Automatic air deodorizer
  - Heated Seat with Temperature Control
  - Warm Air Dryer function
  - Adjustable spray position
  - Programmable energy saver system
  - Multifunctional horizontal remote control
  - Energy save timer
  - Soft Light
  - Smooth seam seat design eliminates the gap under the seat

## COMPONENTS

### CES9E380GCN

- CW927PVB#NW1 Wall Hung Bowl Unit
- TCF9E380GCN#W Functional unit
- WH175BAT In Wall Tank Unit
- MB177M#S Flush Plate Unit

## COLORS

- Silver



## TECHNOLOGY & INNOVATION HIGHLIGHTS


- |                        |                     |
|------------------------|---------------------|
| EWATER+ for WAND       | CEFIONTECT          |
| EWATER+ for BOWL       | TORNADO FLUSH       |
| EWATER+ for UNDER SEAT | RIMLESS             |
| AIR-IN WONDER-WAVE     | WATER SAVING        |
| WARM AIR DRYING        | AUTO OPEN/CLOSE LID |
| HEATED SEAT            | AUTO FLUSH          |
| DEODORIZER             | PREMIST             |

## CODES/STANDARDS

· Please refer to the label for product standards.

TOTO(CHINA) CO.,LTD. All rights reserved.

## DIMENSIONAL DRAWINGS

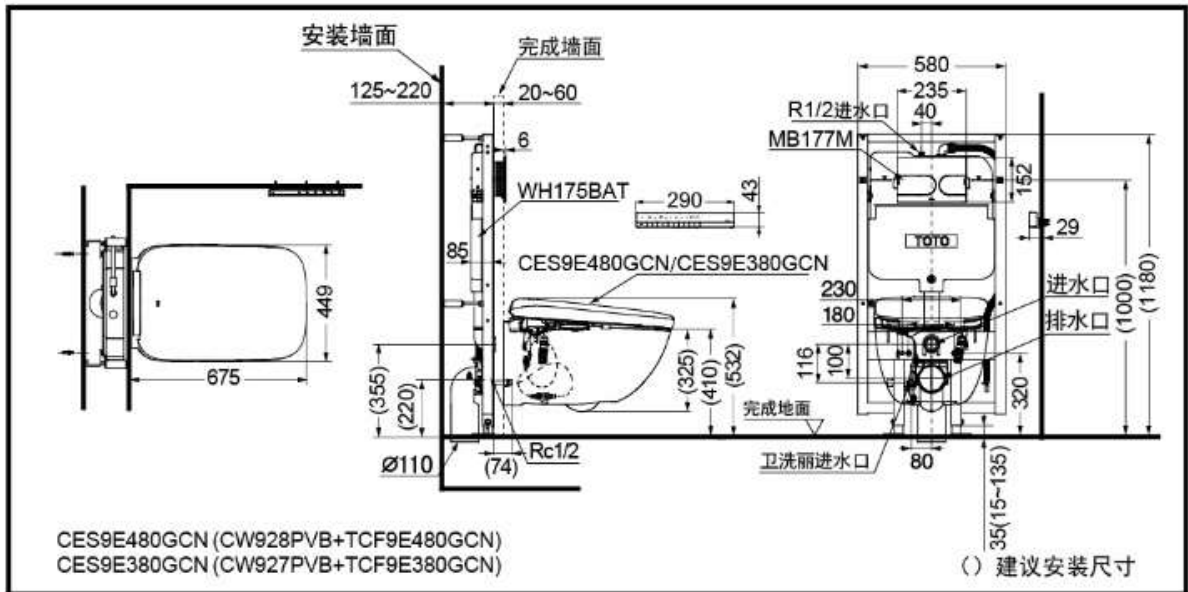

## SPECIFICATIONS

CES9E480GCN		
额定电源	AC220V.50Hz	
额定功率	834W	
最大功率	1452W<进水温度0°C时>	
温水加热方式	瞬间式	
电源线长度	0.5m	
防水保护等级	IPX4	
水效等级	2级	
进水压力	最低必要水压：0.05MPa<流动时>	
	最高水压：0.75MPa<静止时>	
进水温度	0-35°C	
使用温度	0-40°C	
产品尺寸	宽449mm×长675mm×高447mm	
产品重量	约46kg(机部约10kg, 便器36kg)	
便器部		
坐便器	冲洗水量	大4.5L, 小3.0L
	名义冲水量	3.5L
	进水方式	隐藏式水箱
	冲洗方式	TORNADO FLUSH(冲落式)
	尺寸	加长型

机部部			
洗净装置	喷水量	臀部洗净：0.4L/min	
		臀部轻柔洗净：0.4L/min	
		下身洗净：0.4L/min	
		下身护理洗净：0.4L/min	
		水势调节	5档
	吐水温度	温度调节范围：关·约30-40°C	
	加热器功率	1200W	
安全装置	温度保险丝		
防逆流装置	真空开关, 止回阀		
加热便座	表面温度	温度调节范围：关·约28-36°C	
		自动节电时：约26°C, 超级节电时：关	
	加热器功率	59W	
安全装置	温度保险丝		
除臭装置	方式	O2除臭	
	风量	标准模式：约0.09m³/min	
		强力模式：约0.16m³/min	
功率(耗电量)	标准模式：约1.6W		
		强力模式：约4.0W	
温风干燥	温风温度	温度调节范围：约35-60°C	
	风量	约0.25m³/min	
	加热器功率	261W	
	安全装置	温度保险丝	